

## GT3000 FEATURES & SPECIFICATIONS

### MAIN FEATURES

1. five fan speeds controlled by a variable frequency drive or quiet operation
2. exclusive Photo Catalytic Oxidation technology
3. needlepoint and RF ion generation
4. washable rear filter
5. intelligent maintenance reminders
6. adjustable purifier control - 250 to 3000 square feet
7. Away Mode timer for high purification levels in unoccupied spaces
8. full function remote control
9. low energy consumption
10. universal AC/DC power supply
11. eliminates smoke & odors - doesn't cover them up
12. significantly reduces mold, bacteria, and viruses
13. replaceable PCO Cell and Purification Plate



### WARRANTY

~ 1 Year Limited Warranty


### SPECIFICATIONS

- ~ Ozone Output: 360 mg/hr (in Away Mode)
- ~ Technologies
  - Needlepoint Ionization
  - RF Pulse Ionization
  - Scalable Ozone Generation
  - PCO Technology (UV-C, Titanium Dioxide)
- ~ Electrical: 100V-240V/50-60Hz 45W - Operational Anywhere in the World
- ~ Ozone Density: <math><0.05\text{mg}/\text{m}^3</math> (high mode), <math>1.5\text{mg}/\text{m}^3</math> (away mode)
- ~ Ion Generation: 1 million/cm<sup>3</sup>
- ~ Coverage: Up to 3000ft<sup>2</sup>
- ~ Display: STN LCD



### ELECTRICAL CERTIFICATIONS

- ~ UL (US & Canada), CE, PSE, TUV, EK (Korean)
- RoHS Compliant (starting April 15th)

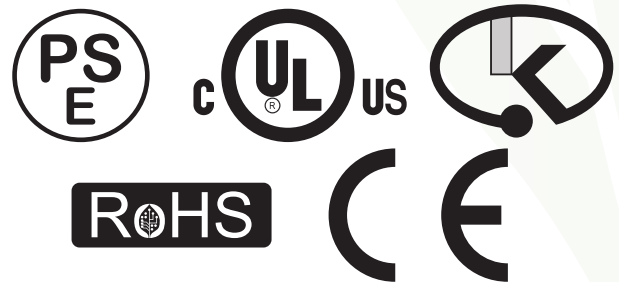

### PACKAGING

- ~ Product Box
  - Color Printed Carton
  - Dimensions: 12" x 18" x 15"  
295mm x 375mm x 450mm
  - Weight: 12.1 lbs, 5.5 kg